

产品说明

Applications

NCA1H-800A 开环霍尔电流传感器适用于对交流、直流、脉冲电流的隔离精确测量，测量时一次侧与二次侧间完全绝缘。

For the electronic measurement of currents: AC, DC, pulsed ..., with galvanic separation between the primary circuits and the secondary circuits.

产品优点 Advantages	产品应用领域 Applications	参照标准 Standards
体积小 Small size and space savings	变频器 Static converters	EN 50178: 1997 IEC 60950-1:2001

#### 主要电气参数 Main electrical data

(@ $\pm I_{PN}$ ,  $R_L = 10 \text{ k}\Omega$ ,  $C_L=10000\text{PF}$   $T_A = 25^\circ\text{C}$ )

额定测量电流 $I_{PN}$	Primary nominal current	800A
测量范围 $I_P$	Primary current measuring range	$\pm 1600\text{A}$
电源电压 $V_C$	Supply voltage	$DC \pm 15(1\pm 5)\text{V}$
电流消耗 $I_C$	Current consumption	$\leq \pm 25\text{mA} + \text{输出测量电压}/\text{负载电阻}$
额定测量输出 $V_{OUT}$	Output voltage	$\pm 4\text{V}$
输出内阻 $R_{OUT}$	Output internal resistance	$102 \Omega$
负载电阻 $R_L$	Load resistance	$\geq 10\text{k}\Omega$

#### 精度 - 动态参数 Accuracy - Dynamic performance data

基本误差 $\delta_I(I_{PN}, T_A=25^\circ\text{C})$	Accuracy(excluding offset)	$\leq \pm 1\%$ of $I_{PN}$
线性度 $\delta_L(0 \dots \pm I_{PN})$	Linearity error	$\leq \pm 1\%$ of $I_{PN}$
零点输出误差 $\delta_Z(T_A = 25^\circ\text{C})$	Electrical offset voltage	$\leq \pm 30\text{mV}$
磁滞失调电压 $V_{OH}(I_p=0, 1 \times I_{PN} \text{ 冲击后})$	Hysteresis offset voltage @ $I_p=0$ , after an excursion of $1 \times I_{PN}$	$\leq \pm 35\text{mV}$
零点温度漂移 $\delta_{Zt}(T_A = -40^\circ\text{C} \sim +85^\circ\text{C})$	Temperature coefficient of $\delta_Z$	$\leq \pm 1\text{mV}/^\circ\text{C}$
满量程温度漂移 $\delta_{FST}(T_A = -40^\circ\text{C} \sim +85^\circ\text{C})$	Temperature coefficient of $V_{OUT}$	$\leq \pm 2\text{mV}/^\circ\text{C}$
响应时间 $T_R(90\% \text{ of } I_{PN} \& di/dt > 100 \text{ A}/\mu\text{s})$	Step response time to 90 % of $I_{PN}$	$\leq 7\mu\text{s}$
带宽(-3dB)BW	Frequency bandwidth (-3dB)	DC ... 25kHz

#### 一般数据 General data


工作温度 $T_A$	Ambient operating temperature	-40~+85°C
------------	-------------------------------	-----------


储存温度 Ts	Ambient storage temperature	-45~+90°C
重量 m	Mass	≤160g

### 绝缘耐压 Insulation coordination

耐压	Voltage for AC insulation test, 50Hz,1min	6kV
绝缘电阻 R <sub>I</sub>	Isolation resistance	≥1000MΩ
爬电距离	Creepage distance	9.9mm
电气间隙	Clearance	9.9mm

NCA1H-800A 电压传感器外形图 Dimensions NCA1H-800A Series (in mm)

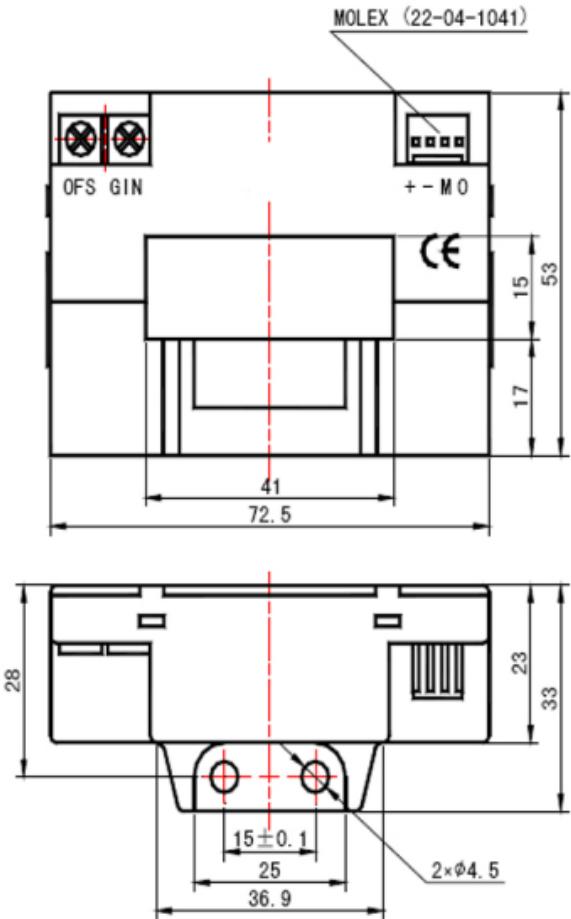

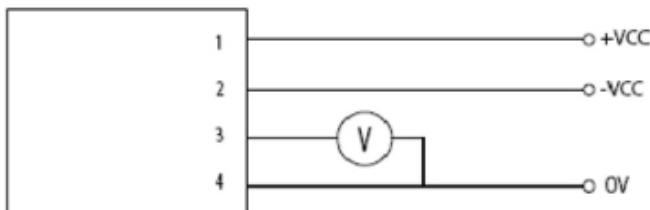

机械特征 Mechanical characteristics		备注 Remark
未注公差 General tolerance	±1 mm	1. 当测量电流方向与传感器上标示的 → 方向一致时, 传感器输出 $V_{OUT}$ 为正。 2. 产品二次侧连接线优选屏蔽线, 屏蔽层接近产品端连接线可接机壳, 负电源或电源 0V
传感器安装方式 Transducer fastening	2 M4 steel screws	3. 传感器安装螺钉孔的垂直度要求: 要求在国家标准 8 级或以上 (或 0.06 以下)。
推荐力矩 Recommended fastening torque	2.5 N · m	4. 传感器接插件要求: 接插件必须选用厂家提供的配件, 禁止使用其它同型号类似配件。
穿心孔 Primary through-hole	41×15mm	传感器安装平面度要求: (a). 大平面安装平面度国家标准 11 级或以上 (或平面起伏小于 0.25mm); (b). 安装面若有小圆凸台设计时平面度要求达国家标准 12 级或以上 (或平面起伏小于 0.5mm)。
次边电气连接 Connection of secondary	Molex 22-04-1041	