

产品说明

Applications

NCA1C-500A/SP10 开环霍尔电流传感器适用于对交流、直流、脉冲电流的隔离精确测量，测量时一次侧与二次侧间完全绝缘。

For the electronic measurement of currents: AC, DC, pulsed ..., with galvanic separation between the primary circuits and the secondary circuits.

| 产品优点 Advantages | 产品应用领域 Applications | 参照标准 Standards |
|----------------------------------|---------------------------------------------------------------------|-----------------------------------|
| 体积小 Small size and space savings | 变频器 Static converters 不间断电源 Uninterruptible Power Supplies (UPS) | EN 50178: 1997 IEC60950-1:2001 |

主要电气参数 Main electrical data

(@ $\pm I_{PN}$, $R_L = 10 \text{ k}\Omega$, $T_A = 25^\circ\text{C}$)

| | | |
|------------------|---------------------------------|-------------------------------------|
| 额定测量电流 I_{PN} | Primary nominal current | 500A |
| 测量范围 I_{PM} | Primary current measuring range | $\pm 900\text{A}$ |
| 电源电压 V_C | Supply voltage | $\text{DC} \pm 15(1 \pm 5)\text{V}$ |
| 电流消耗 I_C | Current consumption | $\leq \pm 30\text{mA}$ |
| 额定测量输出 V_{OUT} | Output voltage | $\pm 4\text{V}$ |
| 输出内阻 R_{OUT} | Output internal resistance | 100Ω |
| 负载电阻 R_L | Load resistance | $\geq 10\text{k}\Omega$ |

精度 - 动态参数 Accuracy - Dynamic performance data

| | | |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------|
| 基本误差 $\delta_I(I_{PN}, T_A=25^\circ\text{C})$ | Accuracy(excluding offset) | $\leq \pm 1\%$ of I_{PN} |
| 线性度 $\delta_L(0 \dots \pm I_{PN})$ | Linearity error | $\leq \pm 1\%$ of I_{PN} |
| 零点输出误差 $\delta_Z(T_A = 25^\circ\text{C})$ | Electrical offset voltage | $\leq \pm 30\text{mV}$ |
| 磁滞失调电压 $V_{OH}(I_p=0, 1 \times I_{PN} \text{ 冲击后})$ | Hysteresis offset voltage @ $I_p=0$, after an excursion of $1 \times I_{PN}$ | $\leq \pm 35\text{mV}$ |
| 零点温度漂移 $\delta_{Zt}(T_A = -40^\circ\text{C} \sim +85^\circ\text{C})$ | Temperature coefficient of δ_Z | $\leq \pm 1\text{mV}/^\circ\text{C}$ |
| 满量程温度漂移 $\delta_{FST}(T_A = -40^\circ\text{C} \sim +85^\circ\text{C})$ | Temperature coefficient of V_{OUT} | $\leq \pm 0.1\%/\text{ }^\circ\text{C}$ |
| 响应时间 $T_R(90\% \text{ of } I_{PN} \& di/dt > 50 \text{ A}/\mu\text{s})$ | Step response time to 90 % of I_{PN} | $\leq 3\mu\text{s}$ |
| 带宽(-3dB)BW | Frequency bandwidth (-3dB) | DC ... 25kHz |

一般数据 General data


| | | |
|------------|-------------------------------|-----------|
| 工作温度 T_A | Ambient operating temperature | -40~+85°C |
|------------|-------------------------------|-----------|

| | | |
|---------|-----------------------------|-----------|
| 储存温度 Ts | Ambient storage temperature | -45~+125℃ |
| 重量 m | Mass | ≤80g |


绝缘耐压 Insulation coordination

| | | |
|----------------------|-------------------------------------------|----------|
| 耐压 | Voltage for AC insulation test, 50Hz,1min | 3kV |
| 绝缘电阻 R _{is} | Isolation resistance | ≥1000M Ω |
| 爬电距离 | Creepage distance | 7.08mm |
| 电气间隙 | Clearance | 6.23mm |

NCA1C-500A/SP10 电压传感器外形图 Dimensions NCA1C-500A/SP10 Series (in mm)

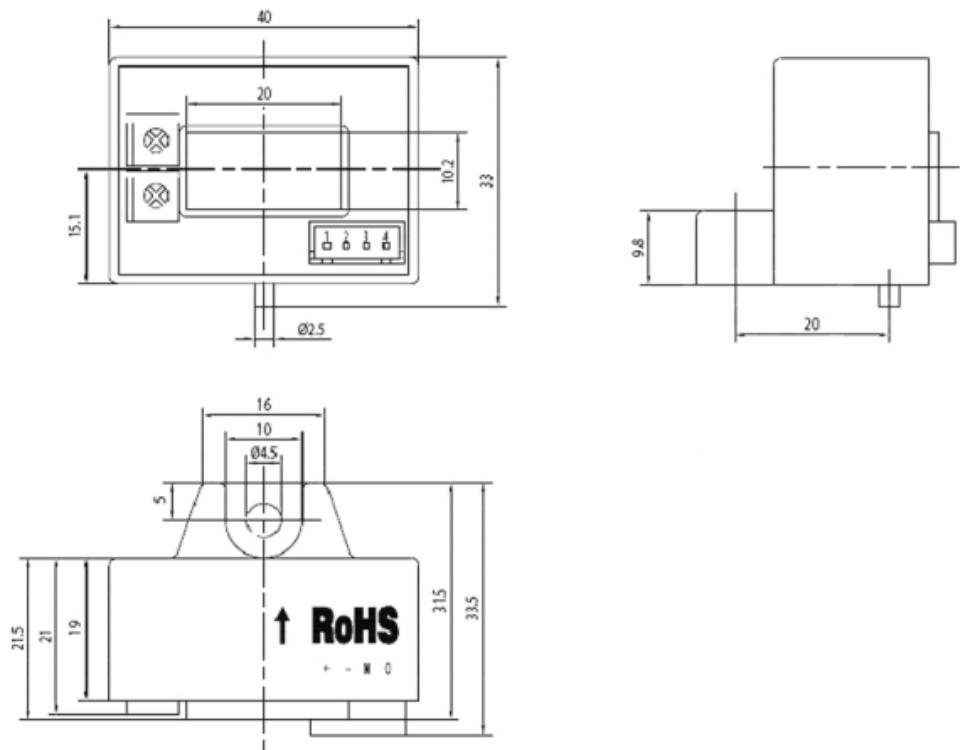

电气连接 Connection

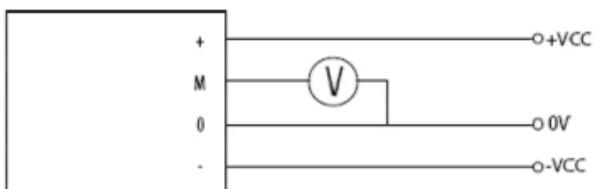

| 机械特征 Mechanical characteristics | 备注 Remark |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 未注公差 General tolerance | ±0.5mm |
| 传感器安装 Transducer fastening | 1 hole ø4.5mm 1 M4 steel screws |
| 推荐力矩 Recommended fastening torque | 0.75 N · m |
| 穿心孔 Primary through-hole | 20.4 × 10.4mm |
| 次边电气连接 Connection of secondary | MOLEX 4芯连接器 |
| | <p>1. 当测量电流方向与传感器上标示的 → 方向一致时，传感器输出 V_{out} 为正。</p> <p>2. 产品二次侧连接线优选屏蔽线，屏蔽层接近产品端连接线可接机壳，负电源或电源 0V</p> <p>3. 传感器安装螺钉孔的垂直度要求：要求在国家标准 8 级或以上（或 0.06 以下）。</p> <p>4. 传感器接插件要求：接插件必须选用厂家提供的配件，禁止使用其它同型号类似配件。</p> <p>传感器安装平面度要求：</p> <p>(a). 大平面安装平面度国家标准 11 级或以上（或平面起伏小于 0.25mm）；</p> <p>(b). 安装面若有小圆凸台设计时平面度要求达国家标准 12 级或以上（或平面起伏小于 0.5mm）。</p> |